



SPECIFICATIONS —

Air-Row DA-248 for Grid Ceilings

Specs

Size	24" x 24" x 9"
Weight	12.6 lbs.
Volts	120
Hz	60 cycles

Performance

Speed	RPM	Full Load Amps	CFM	Running Watts
High	1,550	0.35	805	23
Medium	1,300	0.20	621	17
Low	1,000	0.17	500	8

Description

The Air-Row DA-248 is a destratification fan designed for grid ceilings. This fan delivers a column of air no wider than 2-3' from as high as 40' without a spread that interferes with cases below.

ECM Motor


- 3-speed
- Efficiency 65-70%
- IP 55
- "Instant-Start" feature
- Thermal protection
 - One shot thermal fuse
 - Built-in electronic overload protection

Housing

- 0.040 aluminum
- Powder-coated all colors

Warranty

- Full 3-year warranty
- ETL Certified USA and Canada

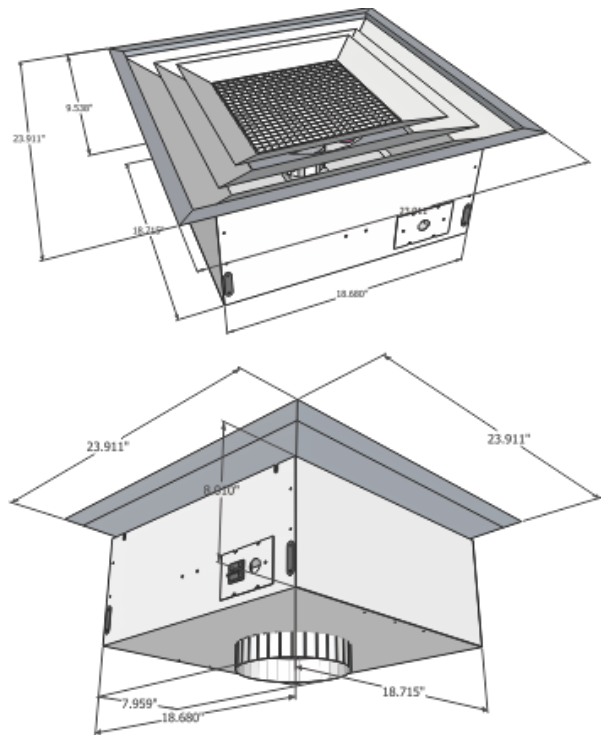

AIR-ROW FANS
Efficiency and Comfort at a Savings

Air-Row Fans
421 Industrial Drive
Carmel, IN 46032

Phone: 317-574-1009
Email: orders@airrowfans.com
Web: www.airrowfans.com

