



SPECIFICATIONS —

# Air-Row LA-248 for Grid Ceilings

## Specs

|        |                |
|--------|----------------|
| Size   | 24" x 24" x 9" |
| Weight | 12.6 lbs.      |
| Volts  | 120            |
| Hz     | 60 cycles      |

## Performance

| Speed  | RPM   | Full Load Amps | CFM | Running Watts |
|--------|-------|----------------|-----|---------------|
| High   | 1,550 | 0.35           | 805 | 23            |
| Medium | 1,300 | 0.20           | 621 | 17            |
| Low    | 1,000 | 0.17           | 500 | 8             |

## Description

The Air-Row LA-248 is a destratification fan designed for grid ceilings. This fan delivers a column of air no wider than 2-3' from as high as 40' without a spread that interferes with cases below.

## ECM Motor



- 3-speed
- Efficiency 65-70%
- IP 55
- "Instant-Start" feature
- Thermal protection
  - One shot thermal fuse
  - Built-in electronic overload protection

## Housing

- 0.040 aluminum
- Powder-coated all colors

## Warranty

- Full 3-year warranty
- ETL Certified USA and Canada

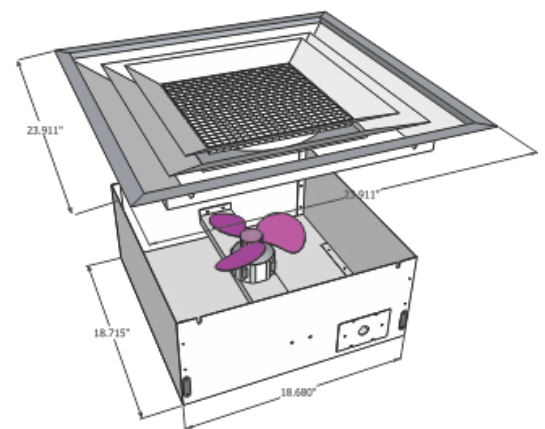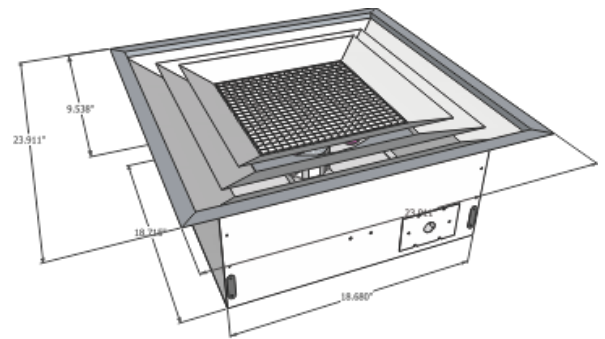

**AIR-ROW FANS**  
Efficiency and Comfort at a Savings

Air-Row Fans  
421 Industrial Drive  
Carmel, IN 46032

Phone: 317-574-1009  
Email: [orders@airrowfans.com](mailto:orders@airrowfans.com)  
Web: [www.airrowfans.com](http://www.airrowfans.com)

